

MADE IN THE USA

Our feed tubing for blow feeding or transporting fasteners or other components is made from high grade urethane or nylon materials with an average durometer of 90-95 and wall thickness ranging from .125 to .156 for a long lasting life cycle which translates to a high abrasion resistant tubing that requires less change out and lower cost to our customers.



Profiles Offered

Round



Square

Rectangular

Internal Hexagon (Round OD)

Custom

CALL OR E-MAIL FOR CURRENT PRICING AND AVAILABLE SIZES OR TO HAVE A CUSTOM SIZE
QUOTED FOR YOUR PROJECT

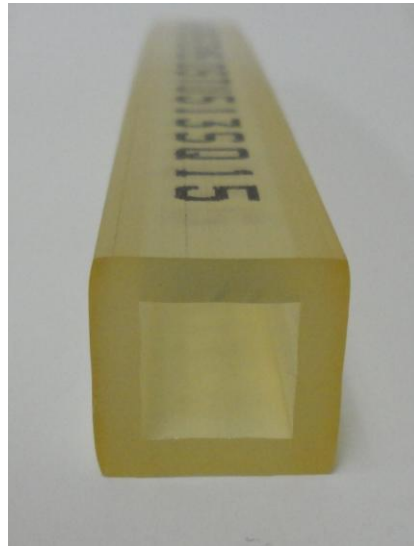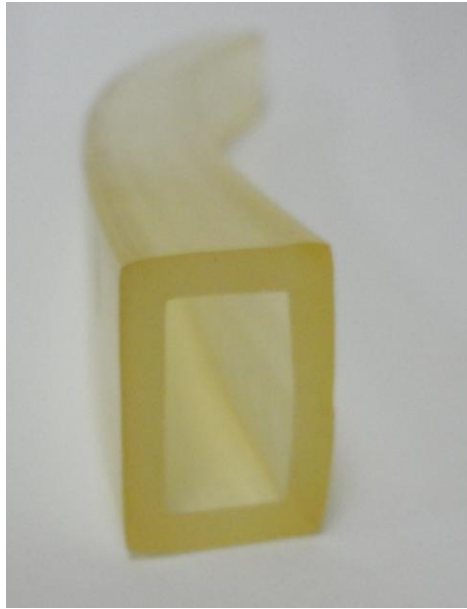

For further information or quotes you can contact us at:

Ph # 989-348-1217 and ask for Nate or John

Emails – nginther@deanesystems.com or johnford@deanesystems.com